


# Product data sheet

## FT503-FB

Model with 2 mm thickened adjusting angle, lock latch guide and switch contact (feedback)

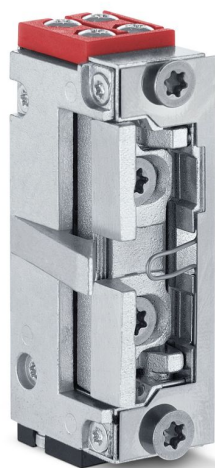

### Product features

---

Compact dimensions
Switch contact (feedback) which is activated by the lock latch
With 2 mm thickened adjusting angle.
Lock latch guide for installation in doors with closed profile edge
MPA approval for fire protection doors
Adjustable radius latch by 3 mm, in 0.75 mm pitch
Twin coil technology enables a larger operating voltage range
Integrated bipolar EMC protective diode, which protects connected electronic components against reverse voltage
Can be installed on left hand and right hand doors as well as vertically or horizontally

### Application Areas

---

Fire protection doors
Connection to direct or alternating current

### Product Data Table

---

Product features	Electric strike for fire protection doors FT503-FB
Height	59.5 mm
Overall depth	15.8 mm
Depth	25.5 mm