


Product data sheet

TS 4000 EFS

Overhead door closer with link arm for single leaf doors of up to 1400 mm leaf width with electric free swing function

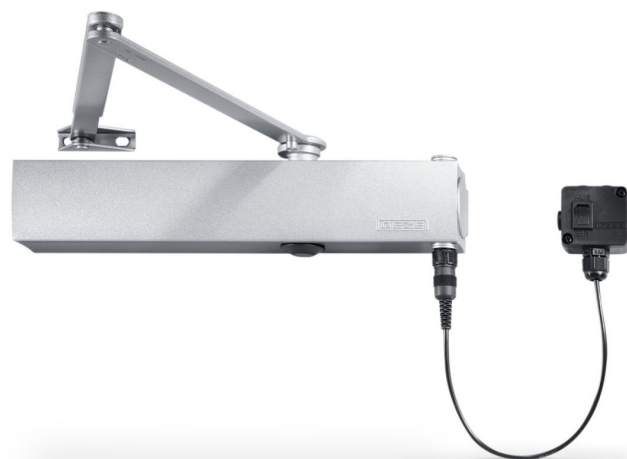

Product features

Closing force with variable adjustment from EN1-6
Operating voltage 24 V DC
Can be used for right and left hand doors without conversion
Free swing function makes it possible to pass through the door with little physical force required
Free swing function once the door has been opened once to approx. 90°
Smoke switch control unit can be connected, whose signal makes the door close automatically in the event of a fire
Mechanical latching action which accelerates the door shortly before the closed position
Closing speed can be individually adjusted
Visual closing force display for easy control of the setting
All functions can be set from the front (except for latching action)

Application Areas

Fire and smoke protection doors
Right and left single-action doors
Single-action doors up to 1400 mm leaf width
Door leaf installation hinge side and transom installation opposite hinge side (different variants)
Hold-open systems with integrated hold-open device with free swing
Barrier-free access in accordance with DIN 18041

Product Data Table

Product features	GEZE TS 4000 EFS
Suitability for fire protection doors	Yes

Accessory

Product name
Set RSZ 6 ECwire
RSZ 6 smoke switch control unit
GEZE GC 152 smoke detector
GEZE GC 153 thermal detector
GEZE AS 500 manual trigger switch
Replacement glass pane
GEZE GC 171 wireless module
GEZE GC 175 wireless input module
GEZE GC 172 wireless smoke detector
GEZE GC 173 wireless thermal detector

Product name

GEZE GC 170 Wireless KIT

Part

Product name

Link arm TS 4000 EFS/RFS

GEZE TS 4000 EFS Closer

GEZE TS 4000 EFS KM BG Closer